


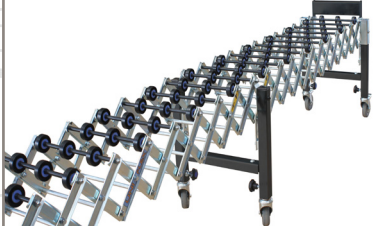


# Convoyeur Extensible

EFFICACITÉ ET SOUPLESSE D'UTILISATION

## CONVOYEURS

### CARACTÉRISTIQUES DES CONVOYEURS : GRAVITAIRES - MOTORISÉS - GALETS

Type de convoyeur	Longueur plié/déplié	Pieds support	Poids	Largeur	Ø	Spécifications
	1.33 - 3.75 m	4	250 kg/m	450 mm 600 mm 750 mm 900 mm	40 mm	Butée d'arrêt
	1.76 - 5.00 m	5				
	2.19 - 6.25 m	6				
	2.62 - 7.50 m	7				Connecteur de liaison
	3.05 - 8.75 m	8				
	3.48 - 10.00 m	9				
	3.91 - 11.25 m	10				
	4.34 - 12.50 m	11				
	4.77 - 13.75 m	12				
	5.20 - 15.00 m	13				
	5.63 - 16.25 m	14				
	6.06 - 17.50 m	15				
	6.49 - 18.75 m	16				
6.92 - 20.00 m	17					
7.35 - 21.25 m	18	Section non flexible				
7.78 - 22.50 m	19					
8.20 - 23.75 m	20					
8.63 - 25.00 m	21					
	1.33 - 3.75 m	4	150 kg/m	450 mm 600 mm 750 mm 900 mm	40 mm	Moteur AC 230/240V
	1.76 - 5.00 m	5				
	2.19 - 6.25 m	6				
	2.62 - 7.50 m	7				Cellule de butée
	3.05 - 8.75 m	8				
	3.48 - 10.00 m	9				
	3.91 - 11.25 m	10				
	4.34 - 12.50 m	11				
	4.77 - 13.75 m	12				
	5.20 - 15.00 m	13				
	5.63 - 16.25 m	14				
	6.06 - 17.50 m	15				
	6.49 - 18.75 m	16				
6.92 - 20.00 m	17					
7.35 - 21.25 m	18	Boîtier d'alimentation				
7.78 - 22.50 m	19					
8.20 - 23.75 m	20					
8.63 - 25.00 m	21					
	1.08 - 3.75 m	4	300 kg/m	450 mm 600 mm 750 mm 900 mm	49 mm	Galets acier
	1.43 - 5.00 m	5				
	1.77 - 6.25 m	6				
	2.12 - 7.50 m	7				Connecteur de liaison
	2.46 - 8.75 m	8				
	2.81 - 10.00 m	9				
	3.15 - 11.25 m	10				
	3.50 - 12.50 m	11				
	3.84 - 13.75 m	12				
	4.19 - 15.00 m	13				
	4.53 - 16.25 m	14				
	4.88 - 17.50 m	15				
	5.22 - 18.75 m	16				
5.57 - 20.00 m	17					
5.91 - 21.25 m	18	Butée d'arrêt				
6.26 - 22.50 m	19					
6.61 - 23.75 m	20					
6.96 - 25.00 m	21					
	0.63 - 2.00 m	2	80 kg/m	300 mm 400 mm 500 mm 600 mm	48 mm	Galets synthétiques
	0.94 - 3.00 m	3				
	1.25 - 4.00 m	4				
	1.57 - 5.00 m	5				Butée d'arrêt
	1.88 - 6.00 m	6				
	2.19 - 7.00 m	7				
	2.50 - 8.00 m	8				
	2.82 - 9.00 m	9				